

Dynaline Sander

Air-Powered In-Line Finishing Sander. Ideal for working wood, metals, composites and solid surfaces.


Model 57407 Non-Vacuum with Clips

- + 2,400 strokes per minute at 90 PSI.
- + Uses PSA coated and non-woven nylon sheets and rolls.
- + Lightweight, low profile composite housing has rubber overmold for a non-slip grip; insulates cold air transmission to operator's hand and minimizes vibration.
- + Quality constructed pad is weight-mated and perfectly-balanced to counter balancer for smooth operation and superior finishes.
- + Includes 2-3/4" (70mm) x 8" (203mm) vinyl face non-vacuum pad with clips (57460).
- + Uses abrasives 2-3/4" (70mm) wide x 11" (279mm) long.
- + 57460 pad with clips can be positioned to any angle...ideal for working up to edges and tight corners.

Abrasive Capacity:

2-3/4" (70mm) and 3-2/3" (93mm) wide abrasive sheets and rolls.

UPDATED!

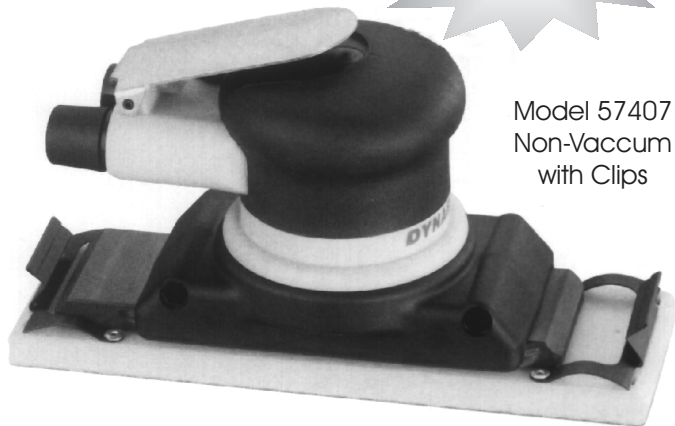

Model 57407
Non-Vacuum
with Clips

Product Description	Length Inch (mm)	Height Inch (mm)	Weight Pound (kg)	Air Flow Rate SCFM (LPM)	Sound Level	Motor HP (W)	Strokes Per Minute	Strokes Inch (mm)	Air Pressure PSI (Bars)
57900	7" (178)	3-3/4" (95)	2.6 LBS. (1.2)	18 (510)	85 dBA	.25 (186)	2,400	3/8" (10)	90 (6.2)

Additional specifications: Air Inlet Thread 1/4" (6 mm) NPT + Hose Size 1/4" (6 mm)